


SR - Underbody Boxes - Aluminum Double Side Open Doors

Underbody boxes are super heavy duty, high capacity and offer easy access from side of truck. Boxes can be mounted with L-Shape or Top Mount Brackets. These boxes are perfect for storing your equipment, like chains, binders, straps, tarps or your personal gear or tools. Underbody boxes are available in different sizes and can be ordered custom size. All AMERICAN TRUCKBOXES boxes are designed and built to keep your equipment safe and secure.

Description

- An engineered aluminum construction
- Fully seam welded on all seams and corners
- Stainless steel heavy duty flush strap hinges
- Fully concealed reversed gutter with automotive weather seal
- Lockable stainless steel over center HD bar latch
- Corners are gusseted for added strength and durability
- Optional gas spring available
- **Optional mirror finish 14g Stainless Steel doors**
- Mounting kit not included: (Kits Av.= M2100 • M2200 Series)

All Smooth Finish

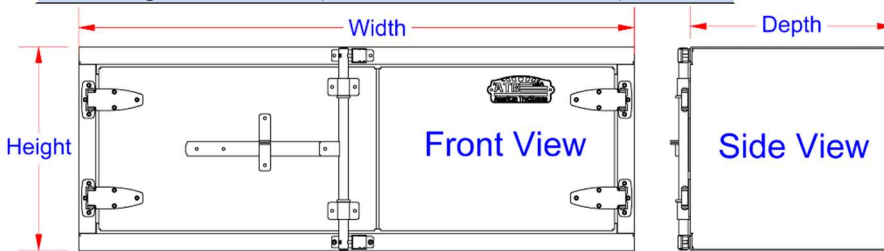

Note: Box door is available in: Standard = Smooth (S), Diamond Tread (T) or Mirror (M) - Coded to end of part number.

No.	Model Number	Material	Height (in.)	Depth (in.)	Width (in.)	Door Opening Height (in.)	Door Opening Width (in.)	Weight (lb.)
1.	A-SR45-181836DL-S	.090 Smooth	18	18	36	13.50	31.50	47
2.	A-SR45-181848DL-S	.090 Smooth	18	18	48	13.50	43.50	55
3.	A-SR45-181860DL-S	.090 Smooth	18	18	60	13.50	55.50	63
4.	A-SR45-182436DL-S	.090 Smooth	18	24	36	13.50	31.50	53
5.	A-SR45-182448DL-S	.090 Smooth	18	24	48	13.50	43.50	61
6.	A-SR45-242436DL-S	.090 Smooth	24	24	36	19.50	31.50	63
7.	A-SR45-242448DL-S	.090 Smooth	24	24	48	19.50	43.50	73
8.	A-SR45-242460DL-S	.090 Smooth	24	24	60	18.50	55.50	83
9.	A-SR55-181836DL-S	.125 Smooth	18	18	36	13-1/8	31-1/8	54
10.	A-SR55-181848DL-S	.125 Smooth	18	18	48	13-1/8	43-1/8	66
11.	A-SR55-181860DL-S	.125 Smooth	18	18	60	13-1/8	55-1/8	76
12.	A-SR55-182436DL-S	.125 Smooth	18	24	36	13-1/8	31-1/8	62
13.	A-SR55-182448DL-S	.125 Smooth	18	24	48	13-1/8	43-1/8	75
14.	A-SR55-182460DL-S	.125 Smooth	18	24	60	13-1/8	55-1/8	88
15.	A-SR55-182472DL-S	.125 Smooth	18	24	72	13-1/8	67-1/8	101
16.	A-SR55-242436DL-S	.125 Smooth	24	24	36	19-1/8	31-1/8	70
17.	A-SR55-242448DL-S	.125 Smooth	24	24	48	19-1/8	43-1/8	85
18.	A-SR55-242460DL-S	.125 Smooth	24	24	60	19-1/8	55-1/8	102
19.	A-SR55-242472DL-S	.125 Smooth	24	24	72	19-1/8	67-1/8	115
20.	A-SR55-242484DL-S	.125 Smooth	24	24	84	19-1/8	79-1/8	130
21.	A-SR55-242496DL-S	.125 Smooth	24	24	96	19-1/8	91-1/8	145